M.E. 530.420 Lab 2: DC Brush Motor Dynamic Parameters

Louis L. Whitcomb*
Department of Mechanical Engineering
G.W.C. Whiting School of Engineering
The Johns Hopkins University
Laboratory Due Date: 6PM Tuesday September 20, 2010 at 115 CSEB

Reading: CH 10.1-10.5, and 10.7.

Your class lecture notes.

Pololu 2284 motor/encoder/gearbox specifications

Spec sheets for Maxon 43.032.000-22.00-146 motor/tachometer (available on the course homepage) comprised of

- Maxon motor model #2332.967-51.236-200 (identified as "967" in the spec sheet).
- Maxon tachometer model #118910

TDS3014 Oscilloscope User Manual – available on the course homepage.

TDS3014 Oscilloscope Training Manual – available on the course homepage

Apparatus: Pololu 2284 motor assembly, Maxon 43.032.000-22.00-146 motor assembly, Tektronix power supply, scope, and DMM.

Show your work. In derivations and computations, be sure to circle your final answer. The questions in this lab are numbered. You must use these numbers in your lab writeup to identify your derivations and answers.

Part 1: Pre-Lab Questions

1 Motor Theory: DC Permanent Magnet Brush Motors - (Pre-Lab Questions)

Answer the following in advance of doing the lab. Assume the motor is connected to a voltage power supply V_s.

Questions 1 through 13 are pre-lab questions.

For Q1: Include dynamic (viscous) friction, and assume that static (coulomb) friction is negligible.

For Q2-Q13: Assume all friction is negligible.

1) What is the equation of motion for a DC permanent magnet brush motor when the *input* is a **voltage**, i.e. it is driven by a voltage power supply? Use symbolic constants for motor parameters. Is this a differential equation or algebraic equation? What is its order? How many degrees of freedom does it have? What is the *state vector* of this system?
2) Derive the expression for the steady-state stall torque of the motor.
3) Derive the expression for the steady-state no-load speed of the motor.
4) Derive the expression for steady-state (in N-m) torque as a function of steady-state angular velocity (in rad/sec).
5) Sketch and label a plot of your function from the previous question. Describe briefly what it tells you.
6) Derive the expression for the steady-state electrical power input of the motor as a function of steady-state angular velocity.
7) Sketch and label a plot of your function from the previous question. Describe briefly what it tells you.
8) Derive the expression for the steady-state mechanical power output of the motor as a function of steady-state angular velocity.
9) Sketch and label a plot of your function from the previous question. Describe briefly what it tells you.

* This laboratory © Louis L. Whitcomb

10) Define the efficiency of an electric motor.

11) Derive the expression for the steady-state efficiency of the motor as a function of steady-state angular velocity.

12) Sketch and label a plot of your function from the previous question. Describe briefly what it tells you.

13) Consider a hypothetical standard DC brush motor with the following motor parameters, powered by a voltage power supply capable of delivering 0V-50V at up to 10 Amps:

Resistance:	R = 5.0 Ohm
Back-Emf Constant:	K_e= 0.5 Volt/(radian-sec)
Torque Constant:	K_t = 0.5 (Newton-Meter)/Amp
Inductance:	L = 200 μ Henry
Friction:	0 (zero).
Inertia:	I = 2.5 * 10^{-4} kg-m^2

For the operating condition of 2.5 Newton-Meters of torque at 50 radians per second, compute the following:

a) Motor Voltage.

b) Motor Current.

c) Electrical power into the motor.

d) Mechanical power out of the motor via the output shaft.

e) Power lost in the motor itself. What happens to this lost power?

f) Efficiency.

g) Can you use this motor and power supply to provide a continuous shaft output of 2 Newton-Meters of torque at 50 radians per second? Explain why or why not. Be specific.

h) Can you use this motor and power supply to provide a continuous shaft output of 3 Newton-Meters of torque at 50 radians per second? Explain why or why not. Be specific.

Part 2: Lab Work

2 D.C. Motor Winding Resistance

14) Use your DMM to measure the resistance of your motor – the resistance between the motor's red and black leads. Make your measurement with the shaft NOT moving. Observe that the resistance values will vary with motor position due to variation in the internal resistance of the brush commutator. Record the lowest measured resistance value.

15) Determine the manufacturer's specification for winding resistance from the Spec Sheet for this model of motor. Note that the winding resistance is not listed explicitly, but you can compute one from the specified stall current and specified nominal operting operating voltage.

16) Compare your measured motor resistance value to the resistance value you computed from the sheet for this motor.

3 Motor Back EMF and Torque Constant Parameters

17) Read from the Pololu spec sheet.

- Hook up the motor's encoder CH A output to the oscilloscope's CH1 input. Recall that this involves the following steps:
  - Verify the pin connection specification in the motor sheet. Note in your writeup the pin number and associated signal for each of the device's six electrical pin connections.

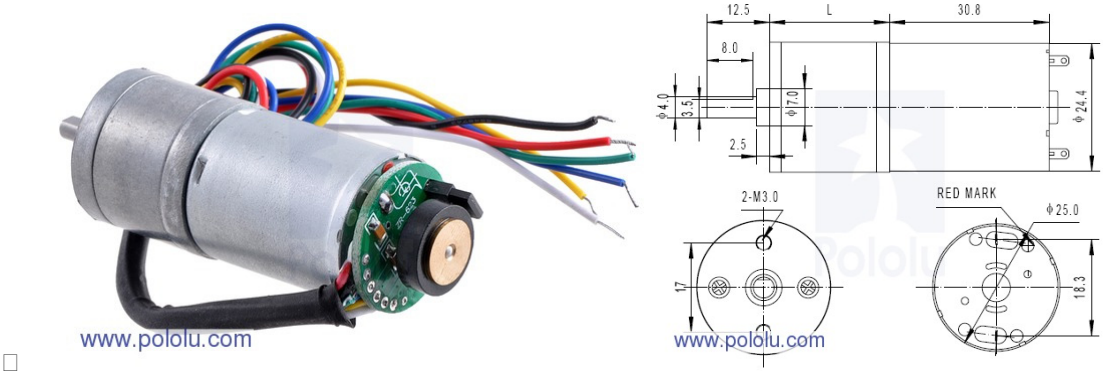

MOTOR CONNECTIONS	
Black	motor power + (positive)
Red	motor power – (negative)
ENCODER CONNECTIONS	
Blue	Hall sensor Vcc (+5V Supply)
Green	Hall sensor GND
Yellow	CH A: Hall sensor A output
White	CH B: Hall sensor B output

Figure 1: Pinout detail from motor datasheet.

  - Connect the encoder pin labeled Vcc to the power supply's fixed 5V "+" output lug using a banana–to–clip test lead.
  - Connect the encoder pin labeled GND to the power supply's fixed 5V "–" output lug using a banana–to–clip test lead.

- Set up the oscilloscope. Be sure to check each channel to verify that it is functioning properly as per Laboratory 1. Verify that the probe type is set to 10X, and that the trigger is set to CH1.
- Connect the encoder output pin labeled CH A to CH 1 of your scope. Hook up the scope's CH 1 ground appropriately.
- Connect the motor's red and black leads directly to CH 2 and CH 2 ground, respectively, of your oscilloscope. As you turn the motor by hand, verify that you can see both the motor back-emf voltage on CH 2, and the encoder square-wave output on CH 1.

18) Rotate the motor shaft clockwise and counter-clockwise manually. Comment on the relation you observe between the motor's shaft speed (magnitude and sign) and the corresponding voltage (magnitude and sign) you observe on the oscilloscope. It may be convenient to have the scope time-axis set to roll-mode (i.e. 1.0 or 0.5 seconds per division) for this exercise.

19) With help from the laboratory instructor, use a variable speed drill drill to carefully rotate your motor at an (approximately) constant angular velocity. Use the scope to measure the motor back-emf voltage (on CH 2) and the encoder output frequencey (on CH 1). Note these values. Print and annotate the scope screen.

20) Repeat to collect at least four data points – i.e. two different positive (clockwise) angular velocities and two different negative (counterclockwise) angular velocities. Print and annotate a scope screen shot for each data point.

Direction	SPEED encoder pulse/sec	Angular Velocity radians/sec (signed)	Back-EMF (volts)

21) Plot your data for back-emf (in Volts) versus **signed** angular velocity in rad/sec.

22) Use your experimental data to compute an experimental value for the motor's back-emf constant k_e. Compute values for k_e. in units of Volts/(rad/sec).

Note that in k_e in SI units of V/(rad/sec) is numerically equal to k_t in SI units of N-m/A.

4 Mechanical Friction Parameters

With CH2 still connected to the motor leads, now also connect the motor power leads to the variable output of your power supply *in series* with your DMM. Use your DMM to measure the DC current (**use the DMM's 0-400 mA setting if available**) supplied to the motor by the power supply. Set the current limit of the variable output power supply to maximum (i.e. a 2A current limit when the "current" knob is turned fully clockwise).

23) Set the power supply output to 1.0V. Note the exact voltage, the motor rotation velocity (from the encoder trace on CH1 of your scope), and the average motor current (from your DMM). Repeat this measurement for the supply voltages listed in the following table:

Motor Supply Voltage	Motor Angular Velocity (no external load) encoder pulse/sec	Motor Angular Velocity (no external load) rad/sec	Motor Current (no external load) Amps	Motor Torque (no external load) N-m
3.0V				
2.0V				
1.0V				
0.0V				
-1.0V				
-2.0V				
-3.0V				

24) Using the value for k_t that you determined experimentally in (22) and your measured values for motor current, i, compute a fourth column in your table for the motor torque, $\tau = k_t \ i$, at each of these data points.

25) Plot a graph of motor torque (on the Y axis) as a function of motor angular velocity (on the X axis).

26) Discuss your graph of motor torque versus motor velocity. Discuss the curious feature of this plot. What is going on here?

27) From your graph, determine approximate experimental values for the motor static friction

$$\tau_{static} = k_S \, sgn(\omega)$$

and the motor dynamic friction

$$\tau_{dynamic} = k_D \, \omega$$

a) Give your experimentally determined value for k_S in units of N-m

b) Give your experimentally determined value for k_D in units of N-m/(rad/sec)

5 Visualizing Speed-Torque Curves

Your lab instructor will set up a Maxon 43.032.000-22.00-146 motor/tachometer comprised of Maxon motor model #2332.967-51.236-200 (identified as "967" in the spec sheet) and tachometer model #118910 to a power supply and an oscilloscope. The scope is set up in XY mode. The Y-axis displays a voltage proportional to motor current (which as you will recall is proportional to torque). The X axis displays the tachometer voltage which is proportional to motor angular velocity.

28) The Y axis displays motor current. Based upon your examination of this lab setup, what is the scale factor of Amps per screen division?

29) The X axis displays tachometer voltage. Based upon your examination of this lab setup, what is the scale factor of radians-per-second per screen division?

30) The instructor will show you how to plot a speed-torque curve for two motor supply voltages: +5V and +10V. Print and annotate scope plots of each.

31) From the scope plots, determine (a) the stall current and (b) no-load speed (in SI units!) of the motor for both motor supply voltages.

32) Use the spec sheet value of kt and the experimentally observed value for stall current (from #37) to compute the stall torque.

33) From the motor spec sheets, determine (a) the stall torque and (b) no-load speed (in SI units!) of the motor for both motor supply voltages.

34) Compare the experimentally observed values (#37+#38) with the derived-from-specification values (#39). How do they compare? Give your answer as a difference (in SI units) and as a percent difference.

- Note your secret code on your lab report.
- Note your lab partner's secret code on your lab report.
- Note your workstation number on your lab report.
- Remember to show your work.
- Typed or hand-written lab reports are OK. Messy or ambiguous lab reports will be rejected.
- **Please clean up your workstation to perfection when you are done.**

Cover Sheet for 530.420 Lab #2: DC Brush Motor Dynamic Parameters

My Secret Code: _____

Fill in the secret code which was provided to you on your graded lab#1.

My Lab Station: _____

My Partner's Secret Code: _____

Lab Station Clean! TA's Signature & Date:

Your TA will sign here after you have finished your lab, cleaned up your lab station to perfection, and shown your lab station to your TA.,